

Last March 16, 1981
Sheet 1-8

243801

8-1

12

14

22

10

PATIENT
WIRELESS
("nurse")OUTPUT
STAGE

S

A-PULSE

INPUT
STAGE

A

INTERFACE

B

TEMPERATURE
SENSE
INPUTECG
INPUT
MAGNET
IN PLACEINFOR
INPUTCarrier
ENABLE

CONTROLLER

B

V-PULSE

DATA
IN/OUT
INTERFACE
MODULEMAGNET
IN PLACE

20


FIGURE 1

Alain A. Langer, et al

Apr. 16, 1981

Sheet 2-8

243801

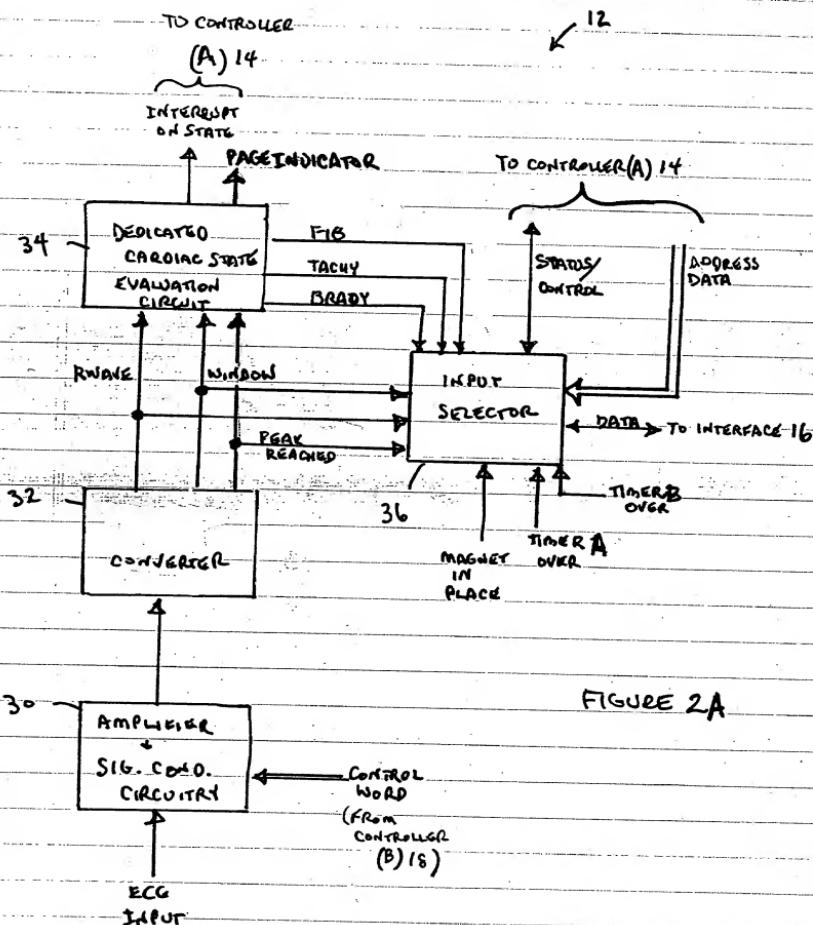

File No. 243801
March 16, 1981
Sheet 3 - 8

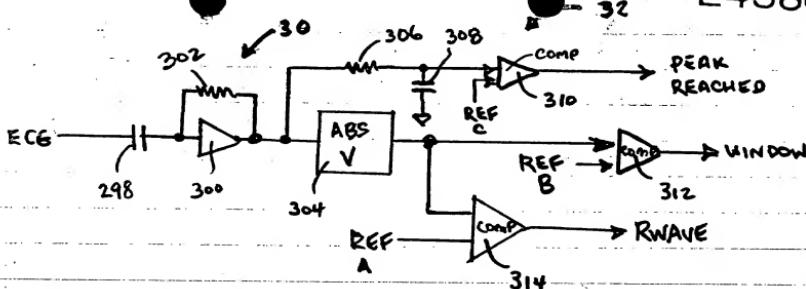


FIGURE 2B

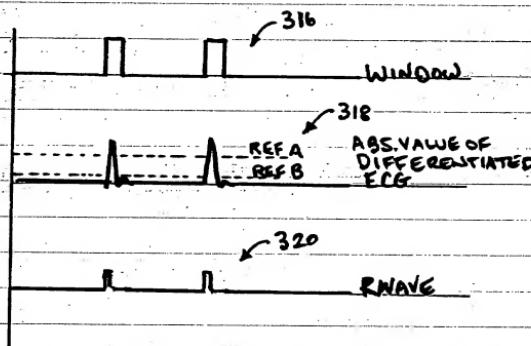


FIGURE 2C

Alma A. Langer, et al.

Friday March 16, 1981

14

INTERRUPT ON STATE

FROM INPUT

STAGE 12

1

243801

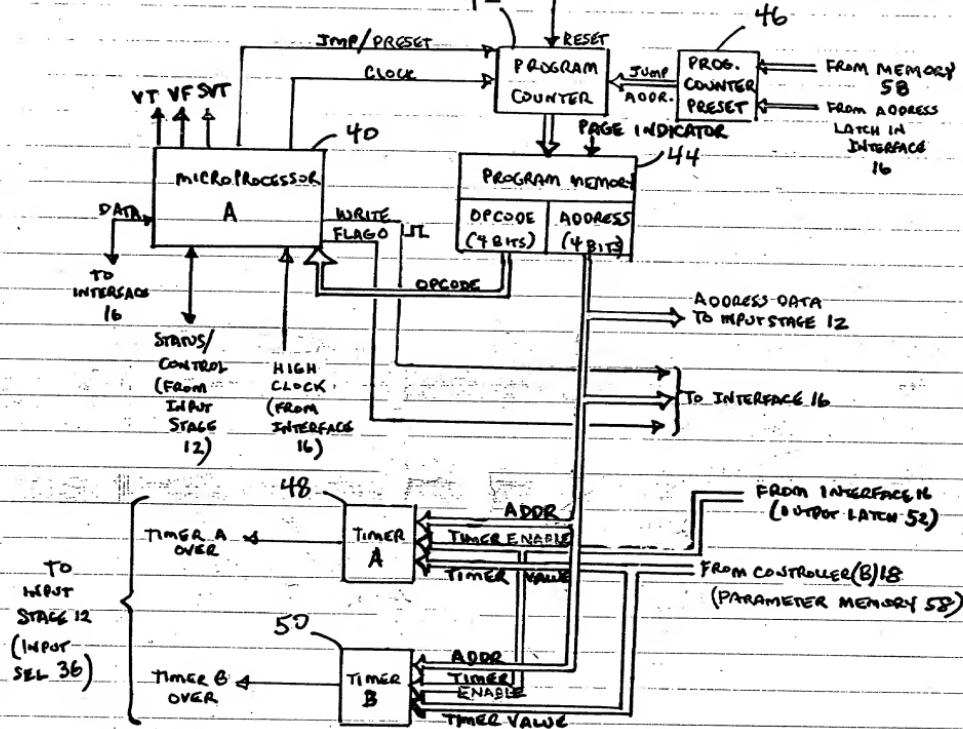


FIGURE 3A

March 16, 1961
Sheet 5-8

243801

PACING MODE 1

(256)

~44

CARDIOVERT

(256)

DEFIBRILLATE

(256)

(256)

(256)

FIGURE 3B

Alvin H. Farquhar, Et al

See March 16, 1981
Sheet 6-8

243801

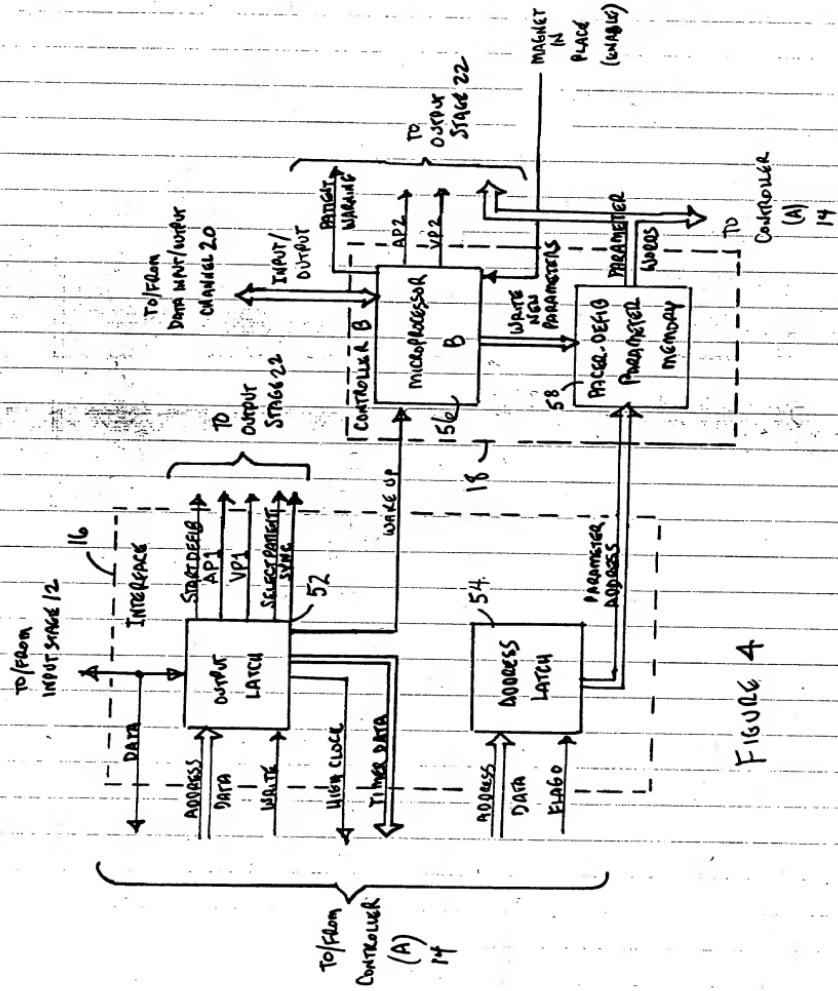


FIGURE 4

Inventor 10/7/7911
Att. 7-4

PARAMETER WORDS
(ENERGY MAGNITUDE)
From CONTROLLER (B) 18
(PARAMETER MEMORY 58)

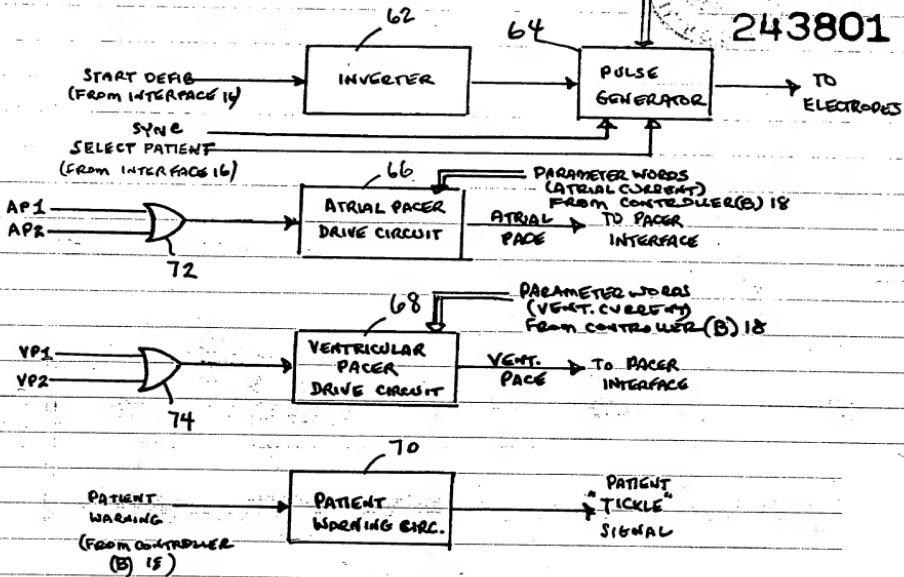


FIGURE 5

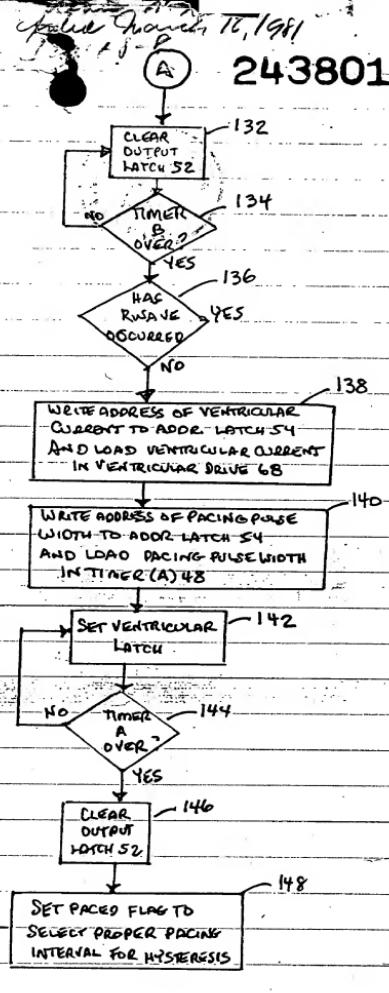


FIGURE 6